

EMC INFRASTRUCTURE FOR VIRTUAL DESKTOPS ENABLED BY EMC[®] VNX[™] SERIES (NFS), VMWARE[®] vSPHERE[™] 4.1, VMWARE VIEW[™] 4.6, AND VMWARE VIEW COMPOSER 2.6

Reference Architecture

EMC SOLUTIONS GROUP

August 2011



Copyright © 2011 EMC Corporation. All Rights Reserved.

EMC believes the information in this publication is accurate as of its publication date. The information is subject to change without notice.

The information in this publication is provided “as is.” EMC Corporation makes no representations or warranties of any kind with respect to the information in this publication, and specifically disclaims implied warranties of merchantability or fitness for a particular purpose.

Use, copying, and distribution of any EMC software described in this publication requires an applicable software license.

For the most up-to-date listing of EMC product names, see EMC Corporation Trademarks on EMC.com.

VMware, ESX, VMware vCenter, VMware vSphere, and VMware View are registered trademarks or trademarks of VMware, Inc. in the United States and/or other jurisdictions.

All trademarks used herein are the property of their respective owners.

VMware may have substituted components of the original environment in this document with hardware of a similar (or higher) specification to the original equipment used in the EMC Proven Solution. The content contained in this document originated from a validated EMC Proven Solution. The modification introduced by VMware may have caused changes in performance, functionality, or scalability of the original solution. Please refer to www.emc.com/solutions for further information on validated EMC Proven Solutions.

Part Number h8282

Table of contents

Reference architecture overview	5
Document purpose	5
Introduction to the EMC VNX series	5
Software suites available	5
Software packs available.....	6
Solution purpose	6
The business challenge.....	6
The technology solution	7
The solution benefits	7
Solution architecture.....	8
Architecture diagram.....	8
Reference architecture overview.....	9
Storage layout.....	10
Storage layout overview	10
File system layout overview.....	11
VNX shared file systems.....	11
Network layout overview	11
Host network configuration	12
VNX5300 network configuration.....	13
Key components	15
Introduction	15
EMC VNX series.....	15
EMC VNX FAST Cache	15
VSI for VMware vSphere	16
VMware View 4.6	16
VMware vSphere 4.1 update 1	17
VMware View architecture	18
Linked clone overview.....	18
Automated pool configuration.....	18
High availability and failover	19
Introduction	19
Storage layer.....	19
Connectivity layer.....	19
Host layer.....	19

- Validated environment profile 20**
 - Profile characteristics..... 20

- Hardware and software resources..... 21**
 - Hardware resources 21
 - Software resources 22

- Conclusion 24**
 - Summary 24
 - Next steps..... 24

- References..... 25**
 - EMC documentation..... 25
 - VMware documentation 25

Reference architecture overview

Document purpose EMC's commitment to consistently maintain and improve quality is led by the Total Customer Experience (TCE) program, which is driven by Six Sigma methodologies. As a result, EMC has built Customer Integration Labs in its Global Solutions Centers to reflect realworld deployments in which TCE use cases are developed and executed. These use cases provide EMC with an insight into the challenges currently facing its customers.

The document describes the reference architecture of the EMC® Infrastructure for Virtual Desktops Enabled by EMC VNX™ Series (NFS), VMware® vSphere™ 4.1, VMware View™ 4.6, and VMware View Composer 2.6 solution, which was tested and validated by the EMC Solutions Group.

Introduction to the EMC VNX series

The EMC VNX series delivers uncompromising scalability and flexibility for the midtier users while providing market-leading simplicity and efficiency to minimize the total cost of ownership. Customers can benefit from the new VNX features such as:

- Next-generation unified storage, optimized for virtualized applications.
- Extended cache by using Flash drives with Fully Automated Storage Tiering for Virtual Pools (FAST VP) and FAST Cache that can be optimized for the highest system performance and lowest storage cost simultaneously on both block and file.
- Multiprotocol support for file, block, and object with object access through EMC Atmos™ Virtual Edition (Atmos VE).
- Simplified management with EMC Unisphere™ for a single management framework for all NAS, SAN, and replication needs.
- Up to three times improvement in performance with the latest Intel multicore CPUs optimized for Flash.
- 6 Gb/s SAS back end with the latest drive technologies supported:
 - 3.5 in. 100 GB and 200 GB Flash, 3.5 in. 300 GB and 600 GB 15k or 10k rpm SAS, and 3.5 in. 2 TB 7.2k rpm NL-SAS
 - 2.5 in. 300 GB and 600 GB 10k rpm SAS
- Expanded EMC UltraFlex™ I/O connectivity—Fibre Channel (FC), Internet Small Computer System Interface (iSCSI), Common Internet File System (CIFS), network file system (NFS) including parallel NFS (pNFS), Multi-Path File System (MPFS), and Fibre Channel over Ethernet (FCoE) connectivity for converged networking over Ethernet.

The VNX series includes five new software suites and three new software packs that make it easier and simpler to attain the maximum overall benefits.

Software suites available

- VNX FAST Suite — Automatically optimizes for the highest system performance and the lowest storage cost simultaneously (FAST VP is not part of the FAST Suite for VNX5100™).

- VNX Local Protection Suite — Practices safe data protection and repurposing.
- VNX Remote Protection Suite — Protects data against localized failures, outages, and disasters.
- VNX Application Protection Suite — Automates application copies and proves compliance.
- VNX Security and Compliance Suite — Keeps data safe from changes, deletions, and malicious activity.

Software packs available

- VNX Total Efficiency Pack — Includes all five software suites (not available for VNX5100).
- VNX Total Protection Pack — Includes local, remote, and application protection suites.
- VNX Total Value Pack — Includes all three protection software suites and the Security and Compliance Suite (VNX5100 exclusively supports this package).

Solution purpose

The purpose of this reference architecture is to build and demonstrate the functionality, performance, and scalability of virtual desktops enabled by EMC VNX series, VMware vSphere 4.1, VMware View 4.6, and VMware View Composer 2.6. This solution is built on an EMC VNX5300™ platform with multiprotocol support, which provides NFS storage for the VMware datastore and CIFS-based storage for the user data.

This reference architecture validates the performance of the solution and provides guidelines to build similar solutions.

This document is not intended to be a comprehensive guide to every aspect of this solution.

The business challenge

Customers require a scalable, tiered, and highly available infrastructure to deploy their virtual desktop environment. Several new technologies are available to assist them to architect a virtual desktop solution. But the customers need to know how to best use these technologies to maximize their investment, support service-level agreements, and reduce their desktop total cost of ownership.

The purpose of this solution is to build a replica of a common customer virtual desktop infrastructure (VDI) environment and validate the environment for performance, scalability, and functionality. Customers will realize:

- Increased control and security of their global, mobile desktop environment, typically their most at-risk environment.
- Better end-user productivity with a more consistent environment.
- Simplified management with the environment contained in the data center.
- Better support of service-level agreements and compliance initiatives.
- Lower operational and maintenance costs.

The technology solution

This solution demonstrates how to use an EMC VNX platform to provide storage resources for a robust VMware View 4.6 environment by using Windows 7 virtual desktops.

Planning and designing the storage infrastructure for VMware View is a critical step because the shared storage must be able to absorb large bursts of input/output (I/O) that occur during the course of a day, which can lead to periods of erratic and unpredictable virtual desktop performance. Users can adapt to slow performance, but unpredictable performance will quickly frustrate them.

To provide predictable performance to a virtual desktop infrastructure, the storage must be able to handle peak I/O load from clients without resulting in high response time. Designing for this workload involves deploying several disks to handle brief periods of extreme I/O pressure. Such a deployment is expensive to implement. This solution uses EMC VNX FAST Cache to reduce the number of disks required.

The solution benefits

This solution aids in the design and implementation for the successful deployment of virtual desktops on VMware View 4.6. This solution balances the performance requirements and cost by using the new features in the VNX Operating Environment (OE) such as EMC VNX FAST Cache. VNX support for NFS also enables the use of VMware NFS datastores for cost-effective and easily deployable storage for the desktop virtualization platform.

Desktop virtualization enables organizations to exploit additional benefits such as:


- Increased security by centralizing business-critical information
- Increased compliance as information is moved from endpoints into the data center
- Simplified and centralized management of desktops

Solution architecture

Architecture diagram

This solution provides a summary and characterization of the tests performed to validate the EMC Infrastructure for Virtual Desktops Enabled by EMC Infrastructure for Virtual Desktops Enabled by EMC VNX Series (NFS), VMware vSphere 4.1, VMware View 4.6, and VMware View Composer 2.6 solution. It involves building a 500-seat VMware View 4.6 environment on VNX and integrating the new features of this platform to provide a compelling and cost-effective VDI platform.

Figure 1 depicts the overall physical architecture of the solution.

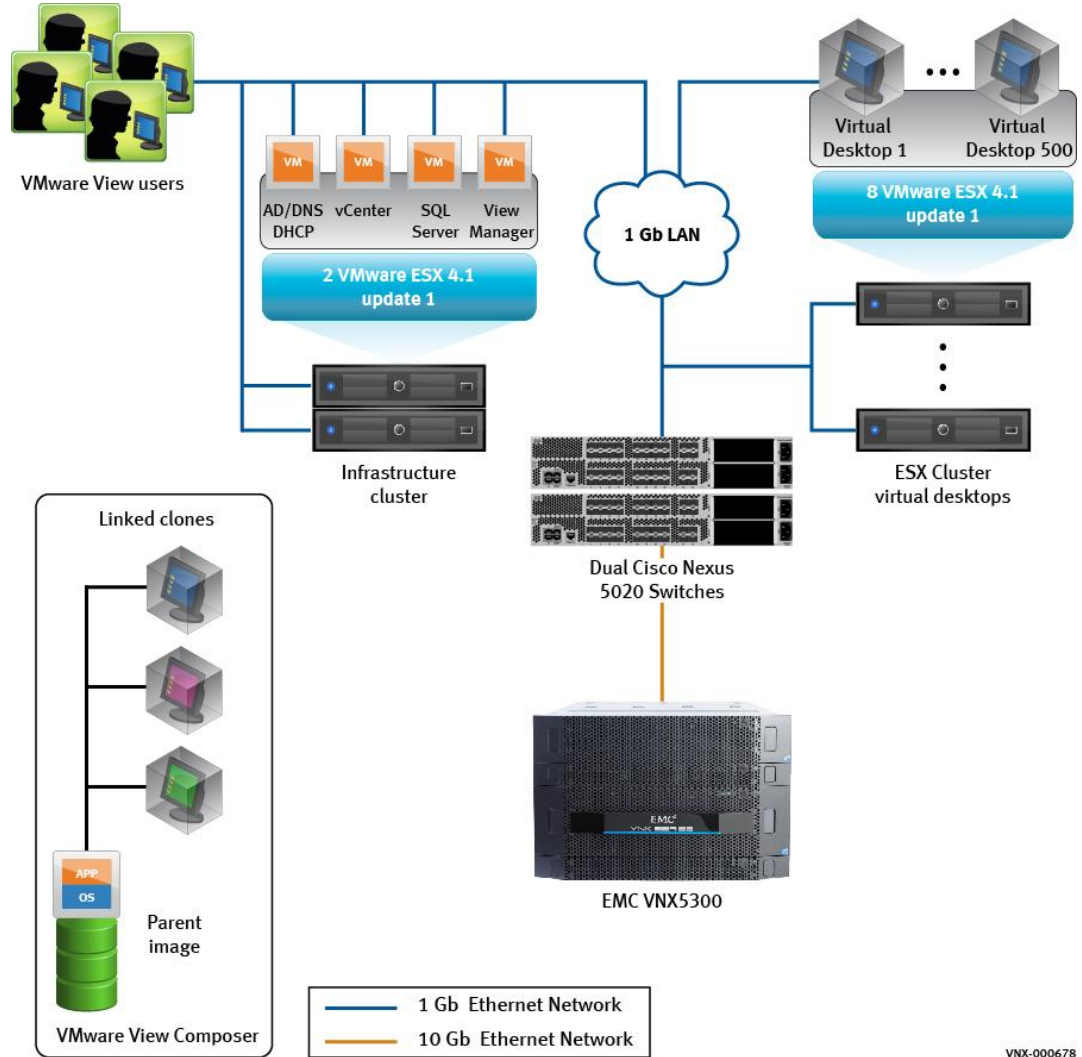

VNX-000678

Figure 1. Physical architecture

The reference architecture consists of the following components.

- **EMC VNX5300 unified storage platform** — Provides storage by using IP (NAS) connections for virtual desktops and infrastructure virtual machines such as VMware View Manager, VMware vCenter™ Servers, Microsoft SQL Server databases, and other supporting services. User profiles and home directories are redirected to CIFS network shares on EMC VNX5300.
- **VMware ESX® 4.1 update 1 server** — A two-node VMware ESX 4.1 update 1 cluster is used to host infrastructure virtual machines. An eight-node VMware ESX 4.1 update 1 cluster is used to host a total of 500 virtual desktops.
- **VMware vCenter Server 4.1 update 1** — Provides a scalable and extensible platform that forms the foundation for virtualization management for the VMware ESX 4.1 update 1 clusters.
- **VMware View Manager 4.6** — Provides virtual desktop delivery, authenticates users, manages the assembly of users' virtual desktop environments, and brokers connections between users and their virtual desktops. In this reference architecture, VMware View Manager 4.6 is installed on Windows Server 2008 R2 and hosted as a virtual machine on a VMware vSphere ESX 4.1 update 1 server.
- **Virtual desktops** — Five hundred virtual desktops that are running Windows 7 are created by using VMware View Composer 2.6 and are deployed as linked clones.
- **Cisco Nexus 5020 switches** — Two Cisco Nexus 5020 switches are used to provide high port density, wire-speed performance, and extremely low latency that meet the growing demand for a 10 Gigabit Ethernet network.
- **Microsoft Windows 2008 domain controller and DNS server** — The Windows 2008 R2 domain controller provides Active Directory services to manage the identities and relationships that make up the Windows environment for the virtual desktops. The Domain Name System (DNS) component of the Windows network infrastructure is also installed on this server. This server is hosted as a virtual machine on a VMware ESX 4.1 update 1 server.
- **Microsoft Windows 2008 dynamic host configuration protocol (DHCP) server** — Centrally manages the IP address scheme for virtual desktops. This service is hosted on the same virtual machine as the domain controller and DNS server.
- **Microsoft SQL Server 2008** — The VMware View Manager and VMware vCenter Server require a database service to store configuration details. Microsoft SQL Server 2008 is used for this purpose. This server is hosted as a virtual machine on a VMware ESX 4.1 update 1 server.
- **Mixed 10- and 1-gigabit IP network** — The Ethernet network infrastructure provides 10-gigabit connectivity to the VNX storage. The 10-gigabit infrastructure allows ESX servers to access NFS datastores on VNX5300 with high bandwidth and low latency. The desktop clients, View components, and Windows server infrastructure reside on the 1-gigabit network.

Storage layout

Figure 2 shows the storage layout of the disks.

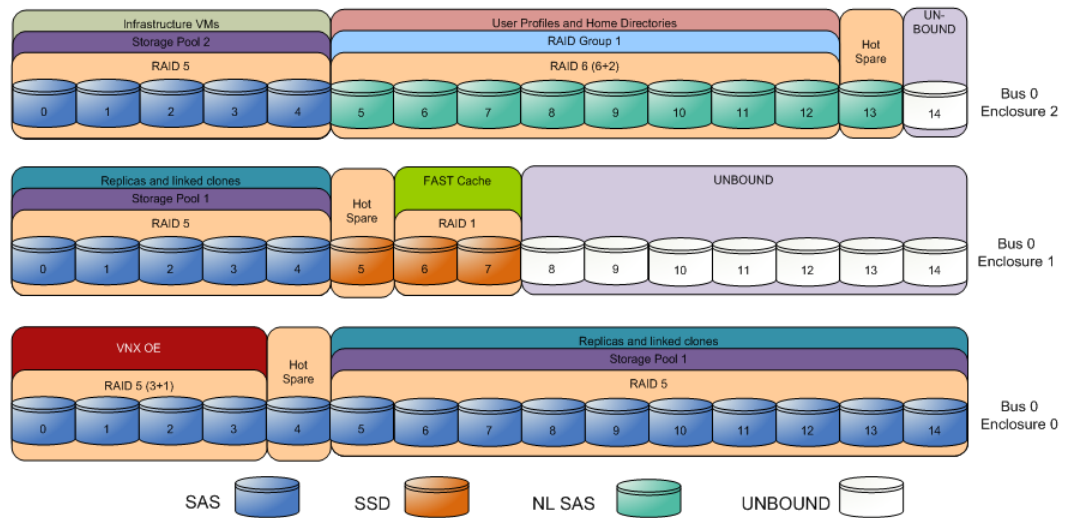


Figure 2. Storage layout

Storage layout overview

The following configurations are used in this reference architecture:

- Four SAS disks (0_0 to 0_3) are used for the VNX OE.
- Disks 0_4, 1_5, and 2_13 are hot spares. These disks are denoted as hot spares in the storage layout diagram.
- Two Flash drives (1_6 and 1_7) are used for EMC VNX FAST Cache. There are no user-configurable LUNs on these drives.
- Fifteen SAS disks (0_5 to 0_14 and 1_0 to 1_4) on RAID 5 storage pool 1 are used to store linked clones and replicas. FAST Cache is enabled for the entire pool. Fifteen LUNs of 200 GB each are carved out of the pool to form three striped volumes, which are used to create six NFS. The file systems are presented to the ESX servers as datastores.
- Eight NL-SAS disks (2_5 to 2_12) on the RAID 6 (6+2) group are used to store user data and roaming profiles. Two VNX file systems are created on two LUNs: a 2 TB file system for profiles and a 4 TB file system for user data.
- Five SAS disks (2_0 to 2_4) on RAID 5 storage pool 2 are used to store infrastructure virtual machines. A 1 TB LUN is carved out of the pool to form an NFS. The file system is presented to the ESX servers as a datastore.
- Disks 1_8 to 1_14 and 2_14 are unbound. They are not used to test this solution.

File system layout overview

Figure 3 shows the layout of the file system.

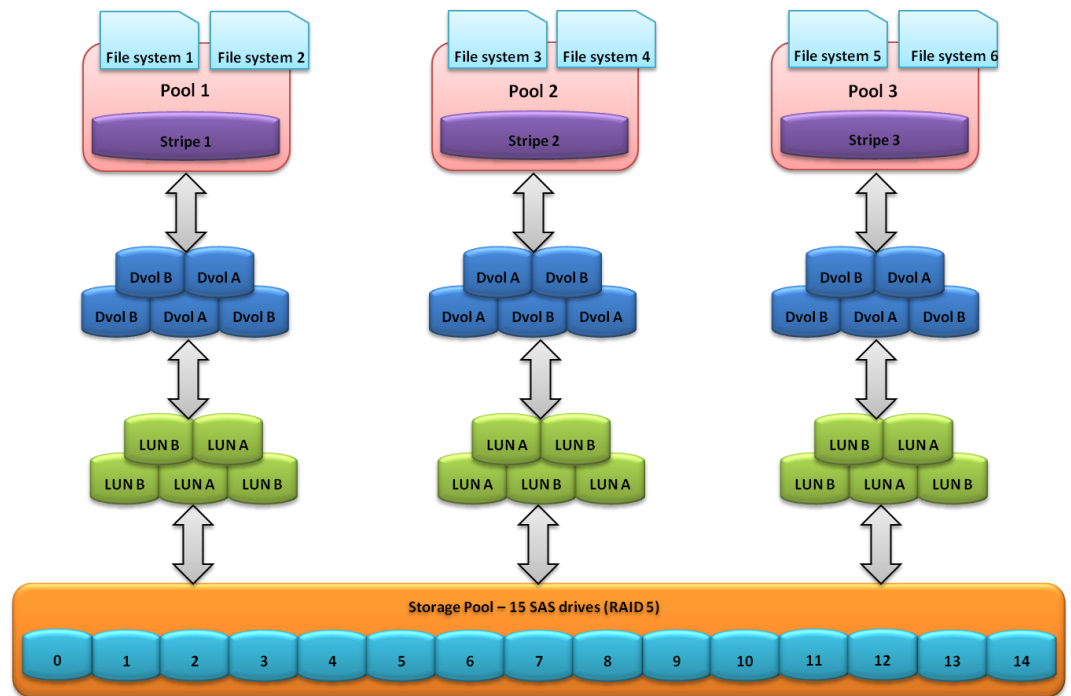


Figure 3. File system layout

Fifteen LUNs of 200 GB each are carved out of the storage pool to create three NAS pools. Each NAS pool stripes across five dvol. Two file systems are carved out of each NAS pool and presented to the ESX servers as datastores. File systems 1 and 2 are used to store replicas. File systems 3 to 6 are used to store the linked clones. A total of 500 desktops are created and each replica is responsible for 250 linked clones.

VNX shared file systems

Two shared file systems are used by the virtual desktops—one for user profiles and the other to redirect user storage that reside in home directories. In general, redirecting users’ data out of the base image to VNX for file enables centralized administration, backup and recovery, and makes the desktops more stateless. Each file system is exported to the environment through a CIFS share.

Network layout overview

Figure 4 shows the 10 Gb Ethernet connectivity between the Cisco Nexus 5020 switches and the EMC VNX storage. Uplink Ethernet ports coming off the Nexus switches can be used to connect to 10 Gb or 1 Gb external LAN. In this solution, the 1 Gb LAN through Cisco Catalyst 6509 switches is used to extend Ethernet connectivity to the desktop clients, VMware View components, and Windows server infrastructure.

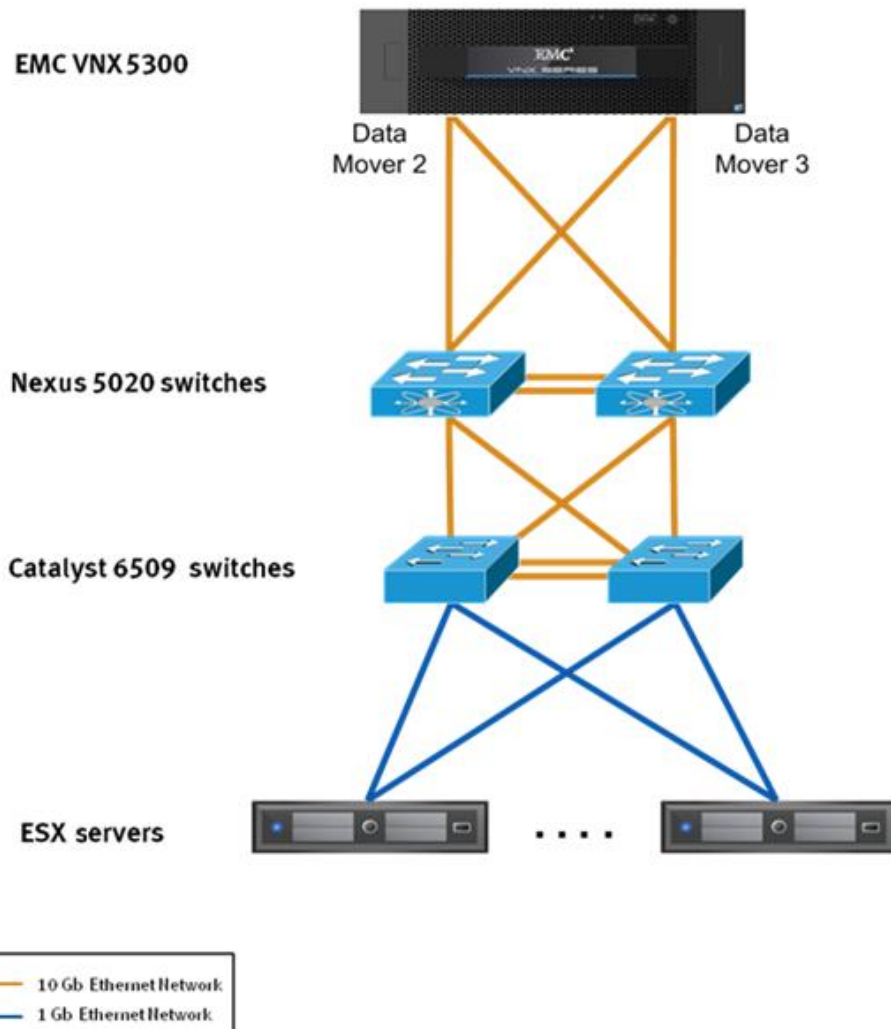


Figure 4. Network layout diagram

Host network configuration

All network interfaces on the ESX servers in this solution use 1 Gb Ethernet connections. All virtual desktops are assigned IP addresses by using a DHCP server. The Intel-based servers use four onboard Broadcom Gb Ethernet controllers for all the network connections. [Figure 5](#) shows the vSwitch configuration in vCenter Server.

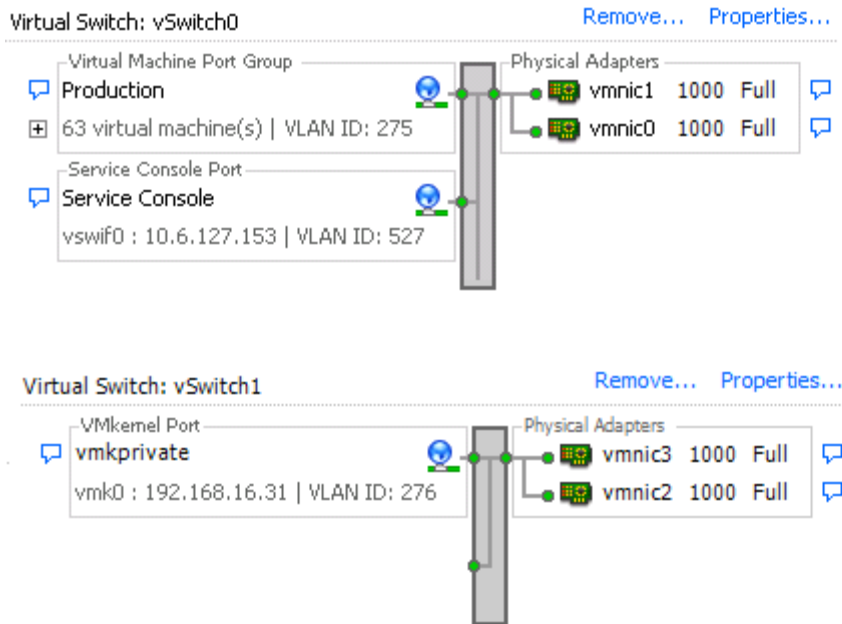


Figure 5. vSwitch configuration in vCenter Server

vSwitch0 and vSwitch1 use two physical network interface cards (NICs) each. Table 1 lists the port groups configured on vSwitch0 and vSwitch1.

Table 1. Port groups configured on vSwitch0 and vSwitch1

Virtual switch	Configured port groups	Used for
vSwitch0	Service Console	Public network administration traffic
vSwitch0	Production	Network connection for virtual desktops and LAN traffic
vSwitch1	Vmkprivate	Used for NFS datastore traffic

VNX5300 network configuration

EMC VNX5300 consists of two Data Movers. The Data Movers can be configured in an active/active or an active/passive configuration. In the active/passive configuration, the passive Data Mover serves as a failover device for the active Data Mover. In this solution, the Data Movers operate in the active/passive mode.

The VNX5300 Data Movers are configured for two 10-gigabit interfaces on a single I/O module. Link Aggregation Control Protocol (LACP) is used to configure ports fxg-1-0 and fxg-1-1 to support virtual machine traffic, home folder access, and external access for roaming profiles.

Figure 6 shows the rear view of two VNX5300 Data Movers that include two 10-gigabit fiber Ethernet (fxg) ports each in I/O expansion slot 1.

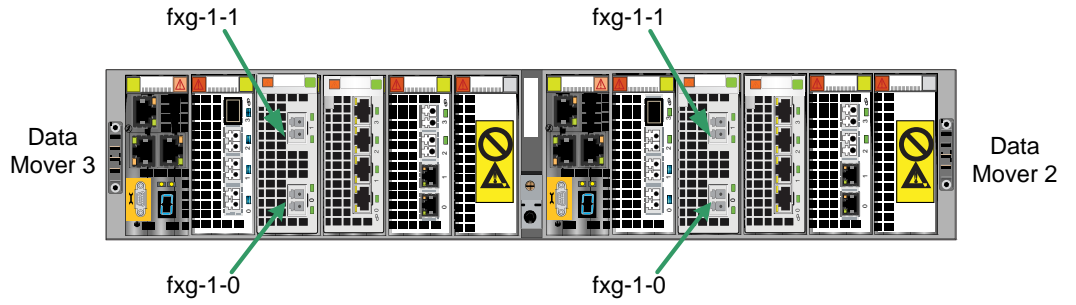


Figure 6. VNX5300 Data Movers

Key components

Introduction

This section briefly describes the key components of this solution:

- EMC VNX series
- VMware View 4.6 desktop virtualization
- VMware vSphere ESX 4.1 update 1 server
- EMC VNX FAST Cache
- VSI for VMware vSphere

“[Hardware and software resources](#)” on page 21 provides more information on the components that make up the solution.

EMC VNX series

The EMC VNX series is a dedicated network server optimized for file and block access that delivers high-end features in a scalable and easy-to-use package.

The VNX series delivers a single-box block and file solution, which offers a centralized point of management for distributed environments. This makes it possible to dynamically grow, share, and cost-effectively manage multiprotocol file systems and provide multiprotocol block access. Administrators can take advantage of the simultaneous support for NFS and CIFS protocols by allowing Windows and Linux/UNIX clients to share files by using the sophisticated file-locking mechanism of VNX for file and VNX for block for high-bandwidth or for latency-sensitive applications.

EMC VNX FAST Cache

VNX FAST Cache, a part of the VNX FAST Suite, enables Flash drives to be used as an expanded cache layer for the array. VNX5300 is configured with two 100 GB Flash drives in a RAID 1 configuration for a 93 GB read/write-capable cache. This is the minimum amount of FAST Cache. Larger configurations are supported for scaling beyond 500 desktops.

FAST Cache is an array-wide feature available for both file and block storage. FAST Cache works by examining 64 KB chunks of data in FAST Cache-enabled objects on the array. Frequently accessed data is copied to the FAST Cache and subsequent accesses to the data chunk are serviced by FAST Cache. This enables immediate promotion of very active data to the Flash drives. This dramatically improves the response times of very active data and reduces data hot spots that can occur within the LUN.

FAST Cache is an extended read/write cache that enables VMware View to deliver consistent performance at Flash drive speeds by absorbing read-heavy activities such as boot storms and antivirus scans, and write-heavy workloads such as operating system patches and application updates. This extended read/write cache is an ideal caching mechanism for View Composer because the base desktop image and other active user data are so frequently accessed that the data is serviced directly from the Flash drives without having to access the slower drives at the lower storage tier.

VSI for VMware vSphere

EMC Virtual Storage Integrator (VSI) for VMware vSphere is a plug-in to the vSphere client that provides a single management interface to manage EMC storage within the vSphere environment. Features can be added and removed from VSI independently, which provides flexibility to customize VSI user environments. The features are managed by using the VSI Feature Manager. VSI provides a unified user experience that allows new features to be introduced rapidly in response to changing customer requirements.

The following features were used during the validation testing:

- Storage Viewer (SV) — Extends the vSphere client to facilitate the discovery and identification of EMC VNX storage devices that are allocated to VMware ESX hosts and virtual machines. SV presents the underlying storage details to the virtual data center administrator, merging the data of several different storage mapping tools into a few seamless vSphere client views.
- Unified Storage Management — Simplifies storage administration of the EMC VNX unified storage platform. It enables VMware administrators to provision new NFS and VMFS datastores, and RDM volumes seamlessly within the vSphere client.

The EMC VSI for VMware vSphere product guides available on EMC Powerlink® website provide more information.

VMware View 4.6

VMware View 4.6 is the leading desktop virtualization solution that enables desktops to deliver cloud computing services to users. VMware View 4.6 integrates effectively with vSphere 4.1 update 1 to provide:

- View Composer 2.6 performance optimization — Optimizes storage utilization and performance by reducing the footprint of virtual desktops and by using tiered storage.
- Tiered storage support — View Composer 2.6 supports the use of different tiers of storage to maximize performance and reduce cost.
- Thin provisioning support — Enables efficient allocation of storage resources when virtual desktops are provisioned. This results in better utilization of storage infrastructure and reduced capital expenditure (CAPEX)/operating expenditure (OPEX).

VMware vSphere 4.1 update 1

VMware vSphere 4.1 update 1 is the market-leading virtualization platform that is used across thousands of IT environments around the world. VMware vSphere 4.1 update 1 can transform or virtualize computer hardware resources including CPU, RAM, hard disk, and network controller to create a fully functional virtual machine that runs its own operating system and application just like a physical computer.

The high-availability features of VMware vSphere 4.1 update 1 along with Distributed Resource Scheduler (DRS) and Storage vMotion® enable seamless migration of virtual desktops from one ESX server to another with minimal or no impact to the customer.

VMware View architecture

Linked clone overview

VMware View 4.6 with View Composer 2.6 uses the concept of linked clones to quickly provision virtual desktops. This reference architecture uses the tiered storage feature of View Composer 2.6 to build linked clones and their replica images on separate datastores as shown in [Figure 7](#).

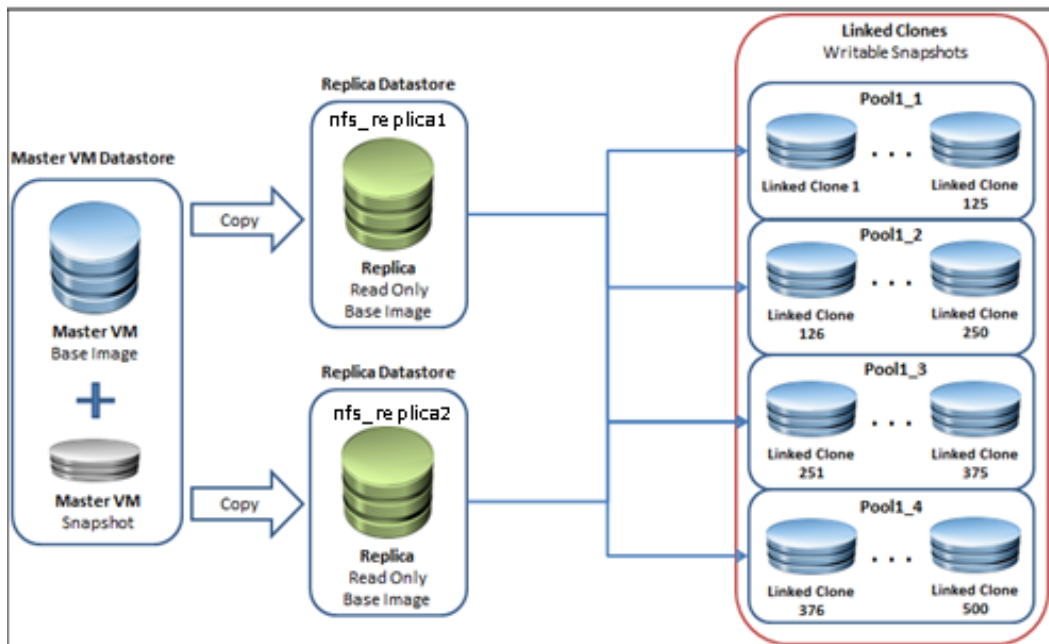


Figure 7. Linked clones and replica images

The operating system reads all the common data from the read-only replica and the unique data that is created by the operating system or user is stored on the linked clone. [Figure 8](#) gives a logical representation of this relationship.

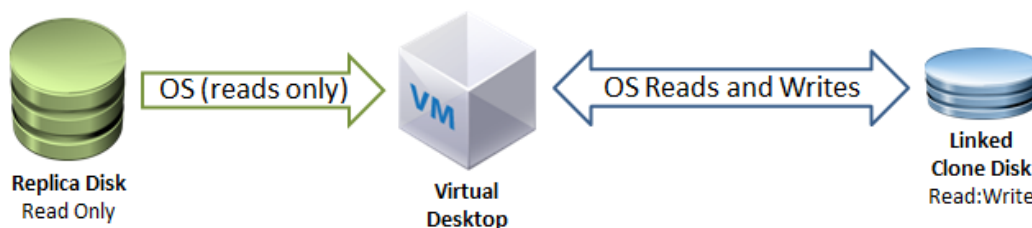


Figure 8. Logical representation of replica disk and linked clone

Automated pool configuration

All 500 desktops are deployed in two automated desktop pools by using a common Windows 7 master image. Two dedicated datastores are used for the replica images and the linked clones are spread across four datastores.

High availability and failover

- Introduction** This solution provides a highly available virtual desktop infrastructure. Each component is configured to provide a robust and scalable solution for the host layer, connectivity layer, and storage layer.
- Storage layer** The VNX series is designed for five 9s availability by using redundant components in the array. All Data Movers, storage processors, and array components are capable of continued operation in case of a hardware failure. The RAID disk configuration on the VNX back end provides protection against data loss due to hard disk failures. The available hot spare drives can be dynamically allocated to replace a failing disk.
- Connectivity layer** The advanced networking features of VNX series such as Fail-Safe Network (FSN) and link aggregation provide protection against network connection failures at the array. Each ESX host has multiple connections to both the Ethernet networks to protect against link failures. These connections are spread across multiple blades in an Ethernet switch to protect against component failure in the switch.
- Host layer** The application hosts have redundant power supplies and network connections to reduce the impact of component failures in the ESX servers. VMware high availability (HA) is configured on the cluster to help recover virtual desktops quickly in case of a complete host failure.

Validated environment profile

Profile characteristics

Table 2 provides the environment profile that was used to validate the solution.

Table 2. Profile characteristics

Profile characteristic	Value
Number of virtual desktops	500
Virtual desktop OS	Windows 7 Enterprise (32-bit)
CPU per virtual desktop	1 vCPU
Number of virtual desktops per CPU core	7.8125
RAM per virtual desktop	1 GB
Average storage available for each virtual desktop	4 GB (vmdk and vswap)
Average IOPS per virtual desktop in steady state	6
Average peak IOPS per virtual desktop during boot storm	127
Number of datastores used to store linked clones	4
Number of datastores used to store replicas	2
Number of virtual desktops per datastore	125
Disk and RAID type for datastores	RAID 5, 300 GB, 15k rpm, 3.5-inch SAS disks
Disk and RAID type for CIFS shares to host roaming user profiles and home directories	RAID 6, 2 TB, 7,200 rpm, 3.5-inch NL-SAS disks
Number of VMware clusters	1
Number of ESX servers per cluster	8
Number of virtual desktops in a cluster	500

Hardware and software resources

Hardware resources

Table 3 lists the hardware used to validate the solution.

Table 3. Hardware details

Hardware	Quantity	Configuration	Notes
EMC VNX5300	1	<p>Two Data Movers (active/passive)</p> <p>Three disk-array enclosures (DAEs) configured with:</p> <ul style="list-style-type: none"> • Twenty five 300 GB, 15k rpm 3.5-in SAS disks • Nine 2 TB, 7,200 rpm 3.5-in NL-SAS disks • Three 100 GB, 3.5-in Flash drives 	VNX shared storage
Intel-based servers	8	<ul style="list-style-type: none"> • Memory: 72 GB of RAM • CPU: Two Intel Xeon X5550 with 2.67 GHz quad core processors • Internal storage: One 73 GB internal SAS disk • External storage: VNX5300 (NFS) • NIC: Quad-port Broadcom BCM5709 1000Base-T adapters 	Virtual desktop ESX cluster
Other servers	2	<ul style="list-style-type: none"> • Memory: 20 GB RAM • CPU: Two Intel Xeon 5450 3.0 GHz quad core processors • Internal storage: One 73 GB internal disk • External storage: VNX5300 (NFS) • NIC: Two Broadcom NetXtreme II BCM 1000 Base-T adapters 	ESX cluster to host infrastructure virtual machines
Cisco Catalyst 6509	2	<ul style="list-style-type: none"> • WS-6509-E switch • WS-x6748 1 Gb line cards • WS-SUP720-3B 	1 Gb host connections distributed over two line cards

Hardware	Quantity	Configuration	Notes
		supervisor	
Cisco Nexus 5020	2	Forty 10 Gb ports	Redundant LAN A/B configuration

Software resources Table 4 lists the software used to validate the solution.

Table 4. Solution software

Software	Configuration
VNX5300 (shared storage, file systems)	
VNX OE for file	Release 7.0.14.0
VNX OE for block	Release 31 (05.31.000.5.006)
VSI for VMware vSphere: Unified Storage Management	Version 4.1
VSI for VMware vSphere: Storage Viewer	Version 4.0.1
Cisco Nexus	
Cisco Nexus 5020	Version 4.2(1)N1(1)
ESX servers	
ESX	ESX 4.1 update 1
vCenter Server	
OS	Windows 2008 R2
VMware vCenter Server	4.1 update 1
VMware View Manager	4.6
VMware View Composer	2.6
Virtual Desktops	
Note: This software is used to generate the test load.	
OS	MS Windows 7 Enterprise (32-bit)
VMware tools	8.3.7
Microsoft Office	Office Enterprise 2007 Version 12
Internet Explorer	8.0.7600.16385
Adobe Reader	9.1.0
McAfee virus scan	8.7.0i Enterprise
Adobe Flash Player	10

Software	Configuration
Bullzip PDF Printer	6.0.0.865
Login VSI (VDI workload generator)	2.1.2 Professional Edition

Conclusion

Summary

The features in VNX OE enable EMC VNX series arrays to drive higher storage consolidation ratios at a lower cost than previously possible. This reduces the capital expenditure on equipment and lowers the operational costs required to support the placement, power, and cooling of the storage arrays.

Feature	Benefits
VMware View 4.6	VMware View simplifies desktop management, reduces desktop operational costs, and increases control for IT while providing end users with flexible access and creating a superior desktop experience for end users over any network.
EMC VNX unified storage	Provides a robust, reliable, and high-performance common storage platform for thousands of virtual desktops. EMC VNX unified storage is a single storage platform that is efficient, powerful, and built for the most demanding virtual environments. Using NAS storage allows the use of NFS datastores for cost-effective and easily deployable storage for the desktop virtualization platform.
VMware vSphere 4.1	Provides a well-established virtualization platform for virtual desktops. vSphere 4.1 adds new storage features to an already rich set of capabilities to help increase and scale virtualized environments.

This reference architecture provides a blueprint of a validated VMware View 4.6 virtualization solution enabled by EMC VNX unified storage and the VMware vSphere 4.1 virtualization platform. The solution is able to support and scale to thousands of virtual desktops.

Next steps

EMC can help accelerate assessment, design, implementation, and management while lowering the implementation risks for an EMC infrastructure for virtual desktops enabled by EMC VNX Series (NFS), VMware vSphere 4.1, VMware View 4.6, and VMware View Composer 2.6.

To learn more about this and other solutions, contact an EMC representative.

References

EMC documentation

The following documents, located on the EMC Powerlink website, provide additional and relevant information. Access to these documents depends on your login credentials. If you do not have access to a document, contact your EMC representative:

- *EMC Performance Optimization for Microsoft Windows XP for the Virtual Desktop Infrastructure—Applied Best Practices*
- *Deploying Microsoft Windows 7 Virtual Desktops with VMware View—Applied Best Practices Guide*
- *EMC Infrastructure for Virtual Desktops Enabled by EMC VNX Series, VMware vSphere 4.1, VMware View 4.5, and VMware View Composer 2.5 —Proven Solution Guide*
- *EMC Infrastructure for Virtual Desktops Enabled by EMC VNX Series, VMware vSphere 4.1, VMware View 4.5, and VMware View Composer 2.5—Reference Architecture*

VMware documentation

The following VMware documents, located on the VMware website, also provide useful information:

- *Introduction to VMware View Manager*
- *VMware View Manager Administrator Guide*
- *VMware View Architecture Planning Guide*
- *VMware View Installation Guide*
- *VMware View Integration Guide*
- *VMware View Reference Architecture*
- *Storage Deployment Guide for VMware View*
- *VMware View Windows XP Deployment Guide*
- *VMware View Guide to Profile Virtualization*